PrimeaCare

Premier Quality & Dedication



MediCare

Health & Compassion

- > Healthcare
- > Education
- > Offices
- > Retail
- > Public Building





MediCare
Health & Compassion

2 m | Heavy Traffic | PUR Coating

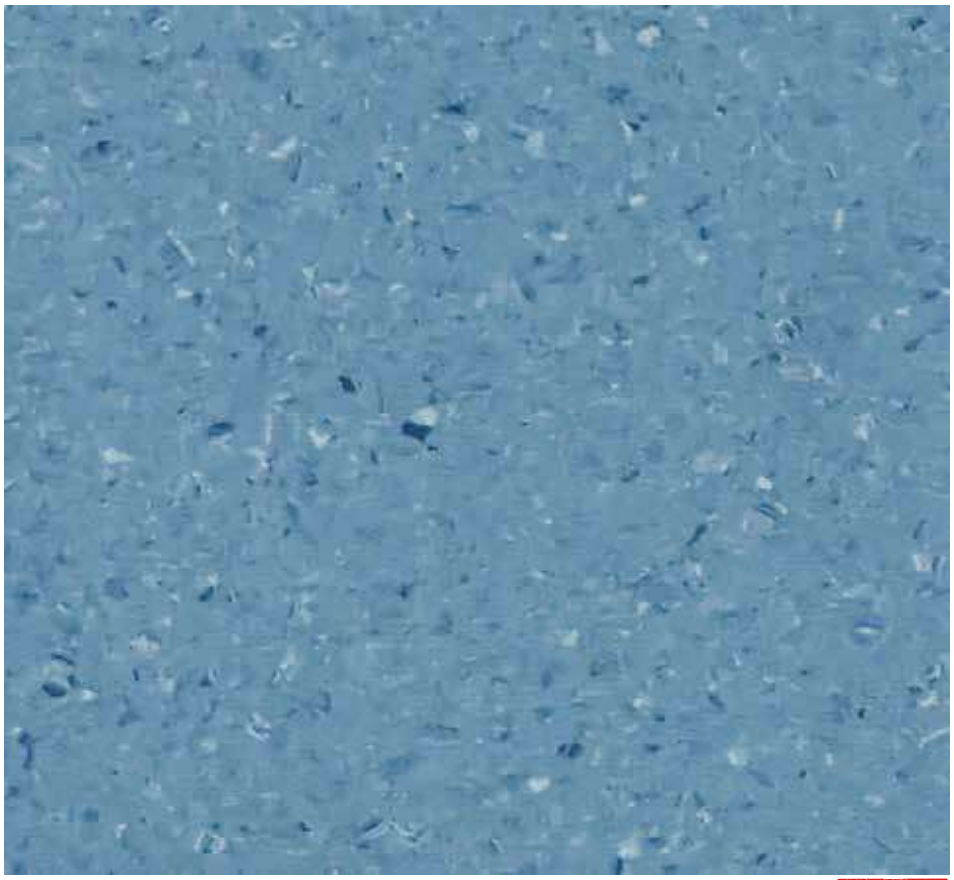

5919 IN STOCK



5916 IN STOCK

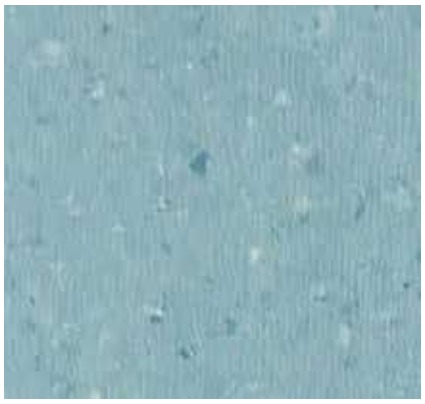

5917

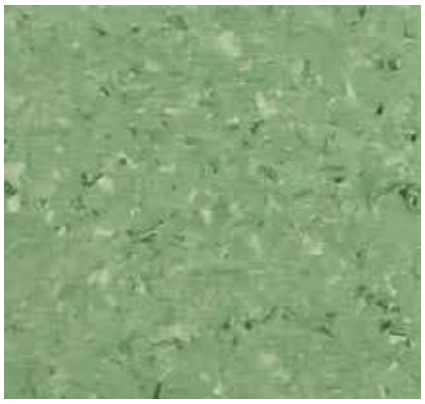

5903



5911

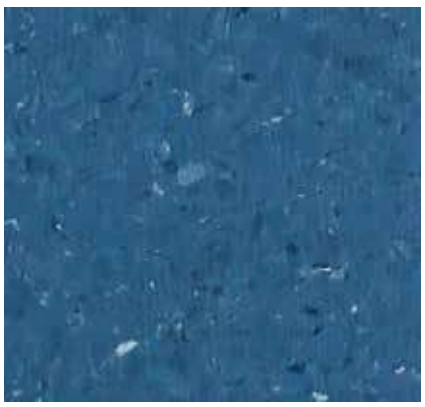

5920

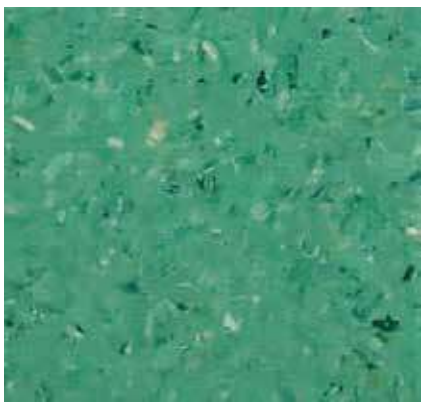

5908



5922



5912 IN STOCK

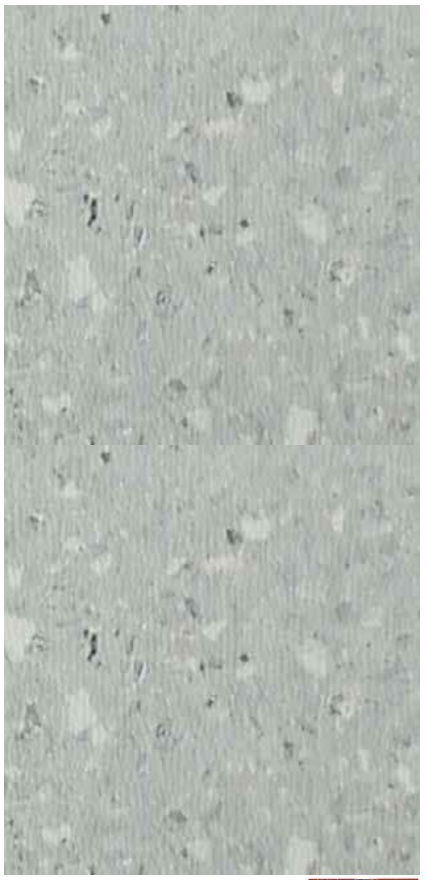

5904 IN STOCK



5910



5902



5924



5914

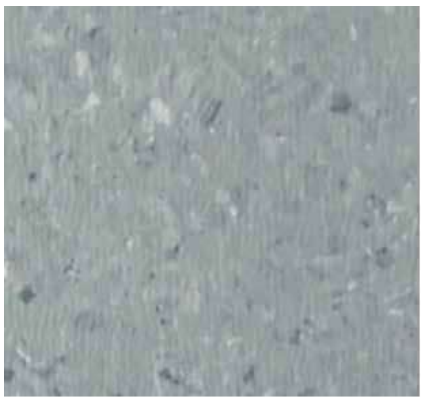

5905

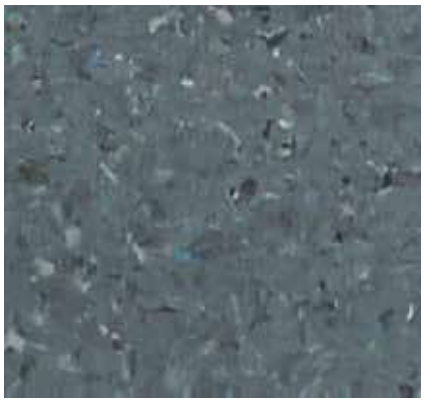

5907

MediCare
Health & Compassion



MediCare is a durable, multi-purpose homogeneous vinyl flooring with non-directional designs. It is an ideal solution for heavy traffic areas such as healthcare, education, offices, retail, and public buildings. MediCare has a surface treated with PUR reinforcement, which means no waxing or polishing for life and excellent life cycle costs. The PUR also provides a good base for future maintenance procedures.

INSTALLATION

MediCare homogeneous vinyl should be stored vertically. Installation should be made in accordance with installation guidelines supplied and regularly updated by our technical department. Installation should be carried out in accordance with local standards. Subfloor to be smooth, hard, clean, and dry prior to laying. Where applicable, the subfloor must incorporate an effective Damp Proof Membrane (DPM). The material must be allowed to acclimatise for 24 hours prior to installation in a room temperature of between 18–24°C. All seams must be heat welded using the matching weld rod.

MAINTENANCE

Maintenance should be carried out regularly to retain the appearance and durability of the floor. The floorcovering should be maintained with regular sweeping and damp mopping using a neutral cleanser, or machine scrubbing with an appropriate pad. Further maintenance instructions are available upon request.

TECHNICAL DATA

DESCRIPTION			
Total thickness	EN ISO 24346	mm	2.0
Wearlayer thickness	EN ISO 24340	mm	2.0
Roll width	EN ISO 24341	cm	200
Roll length	EN ISO 24341	lm	20
CLASSIFICATION			
Classification	EN ISO 10874	class	34-43
Fire rating	EN 13 501-1	class	Bfl-s1
	ASTM E648-08	class	Class I
Electrical propensity	EN 1815	kV	< 2
Slip resistance	DIN 51130	class	R9
PERFORMANCE			
Binder content	EN ISO 10581	type	II
Dimensional stability	EN ISO 23999	%	≤ 0.40
Impact sound insulation	EN ISO 717-2	dB	5
Residual indentation	EN ISO 24343-1	mm	≤ 0.10
Castor chair test	ISO 4918	--	Pass
Thermal conductivity	EN ISO 10456	W/(m.K)	0.25
Colour fastness	EN 105 - B02	degree	≥6
Surface treatment	--	--	PUR
Chemical resistance	EN ISO 26987	class	Good
Anti-bacterial activity	ISO 22196	--	>99%
TVOC after 28 days	ISO 16000-6	µg/m3	<10
CE MARKING CE	EN 14041		

PrimeaCare

Premier Quality & Dedication









UniCare

Unified Solutions for Every Space

Basketball | Volleyball | Badminton | Futsal | Handball | Table tennis

WOOD Colours

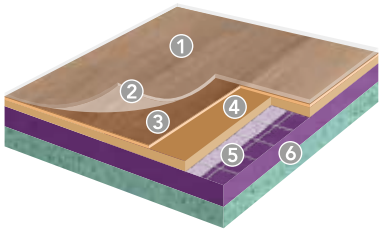

1. PUR coating(Available by request)
2. Durable wear layer
3. Printing layer
4. Compact layer
5. Reinforced fiberglass layers
6. Closed cell foam backing

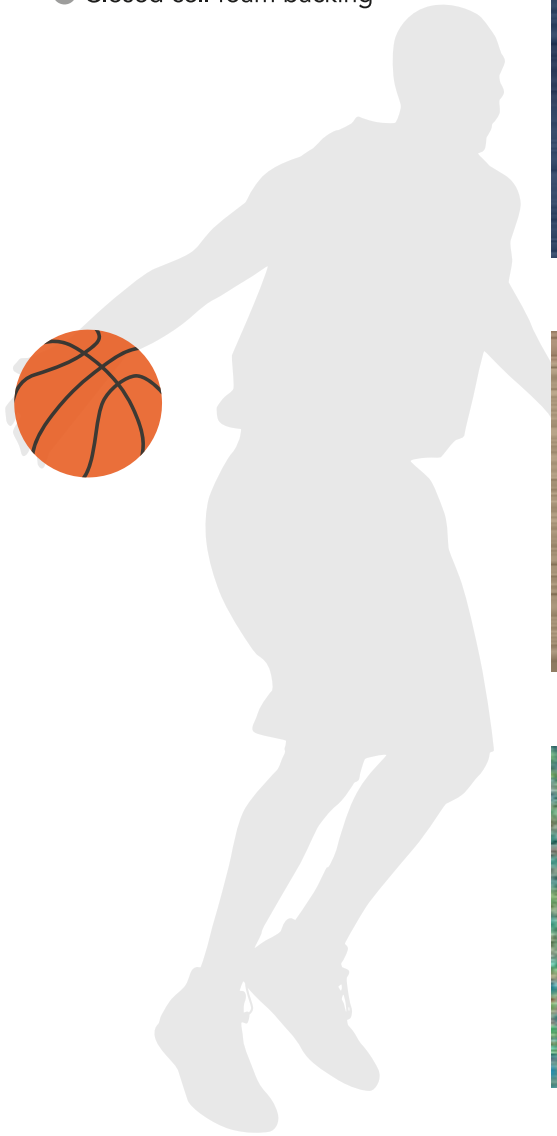



Maple 6381

IN STOCK



Oak 6375

IN STOCK



Maple Blue 6453



Maple Grey 6701

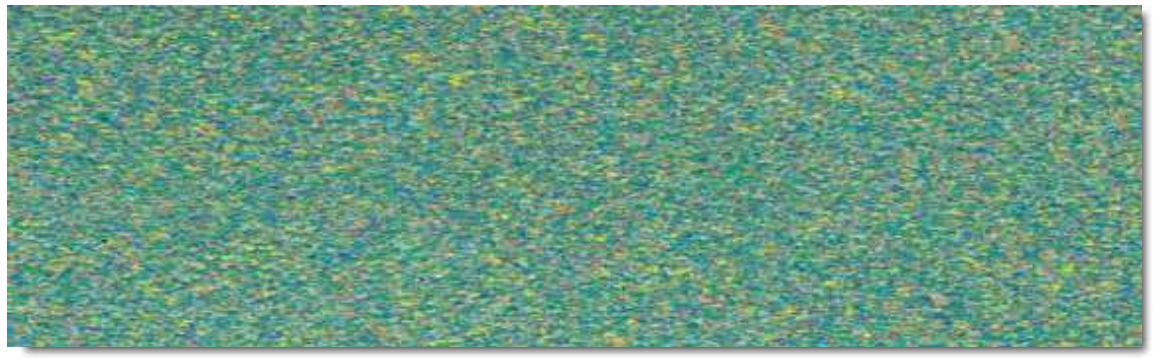

Underlayer 6mm

IN STOCK

*Product lifetime: 10 years

UNI Colours

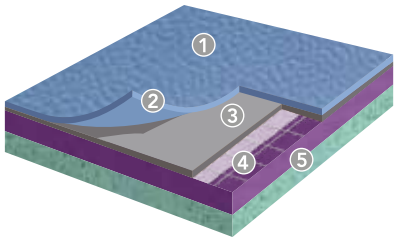

1. PUR coating(Available by request)
2. Durable wear layer
3. Compact layer
4. Reinforced fiberglass layers
5. Closed cell foam backing

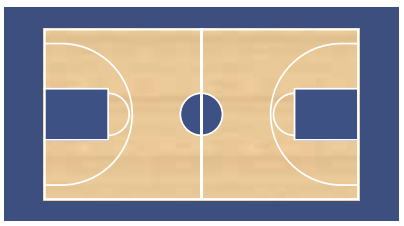

BASKETBALL
Play area: 28m X 15m
Play area + surround: 32m X 19m

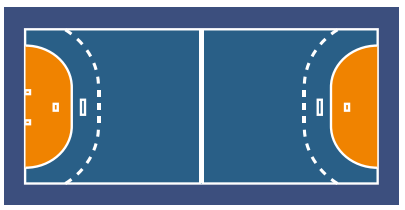

HANDBALL
Play area: 40m X 20m
Play area + surround: 44m X 24m

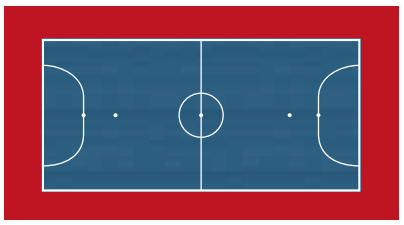

FUTSAL
Play area: 38~42m X 18~22m
Line width: 8cm



Light Blue 6445 IN STOCK



Dark Blue 6430 IN STOCK



Grey 6873 IN STOCK



Red 6180



Orange 6038



Mint Green 6570

*Product lifetime: 10 years

UniCare

Unified Solutions for Every Space

UniCare is a multi-purpose vinyl sports flooring that has been designed to accommodate a wide range of sporting events. Uni Care is available in four thicknesses to satisfy varying degrees of shock absorption and performance requirements adapted to all levels of sports.

TECHNICAL DATA	STANDARD	SPORTS 45	SPORTS 60	SPORTS 80
PRODUCT DESCRIPTION				
Total thickness	EN 428	4.5mm	6.0mm	8.0mm
Width	EN 426	1.8m	1.8m	1.8m
Length	EN 426	20.0m	20.0m	20.0m
Weight	EN 430	2.9kg/m²	4.2kg/m²	5.2kg/m²
SPORTS CHARACTERISTICS				
Shock absorption	EN 14808	23%	32%	38%
Vertical deformation	EN 14809	≤3.5	≤3.5	≤3.5
Energy return	NF P 90 203	≥0.31	≥0.31	≥0.31
Sliding coefficient	EN 13036-4	80 -110	80 -110	80 -110
Ball bounce	EN 12235	≥90%	≥90%	≥90%
TECHNICAL CHARACTERISTICS				
Abrasion resistance	EN ISO 5470-1	≤350mg	≤350mg	≤350mg
Impact resistance	EN 1517	≥8	≥8	≥8
Indentation resistance	EN 1516	≤0.5mm	≤0.5mm	≤0.5mm
Surface treatment	---	PUR	PUR	PUR
Foam backing	---	Honeycomb	Honeycomb	Honeycomb
Anti-bacterial	---	Yes	Yes	Yes
CLASSIFICATION				
Fire resistance	EN 13501-1	Cfl-s1	Cfl-s1	Cfl-s1
Light resistance	EN ISO 105-B02	≥6	≥6	≥6
Sound isolation	EN ISO 717/2	20dB	22dB	26dB
CE MARKING CE	EN 14041			

Olympic Games | World Championships | Asian Games

Partner of International Sport Events

PrimeaCare

Premier Quality & Dedication

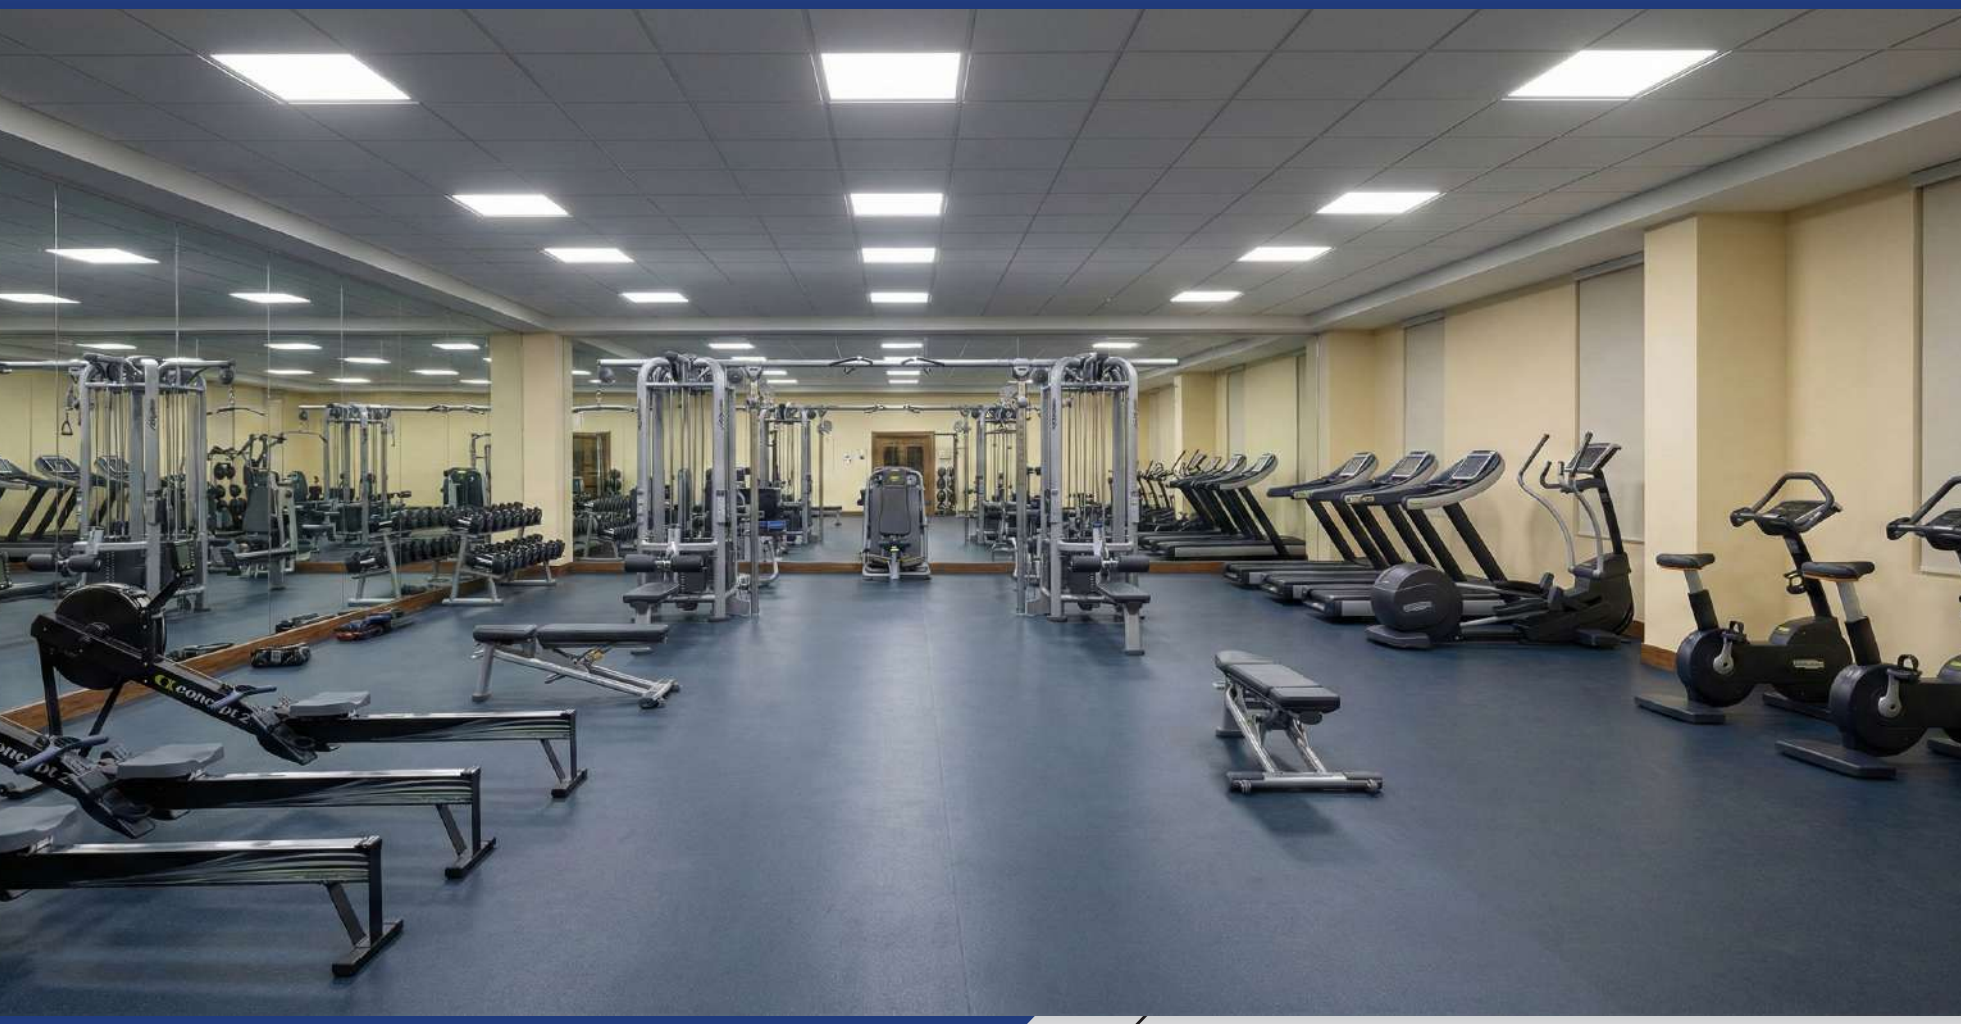

FlexiCare

Adaptable Solutions

- > Home Gyms
- > Fitness Clubs
- > Garages & Basements
- > Commercial & Traffic Areas
- > Multi-purpose Sports Rooms





Fitness Flooring Solutions

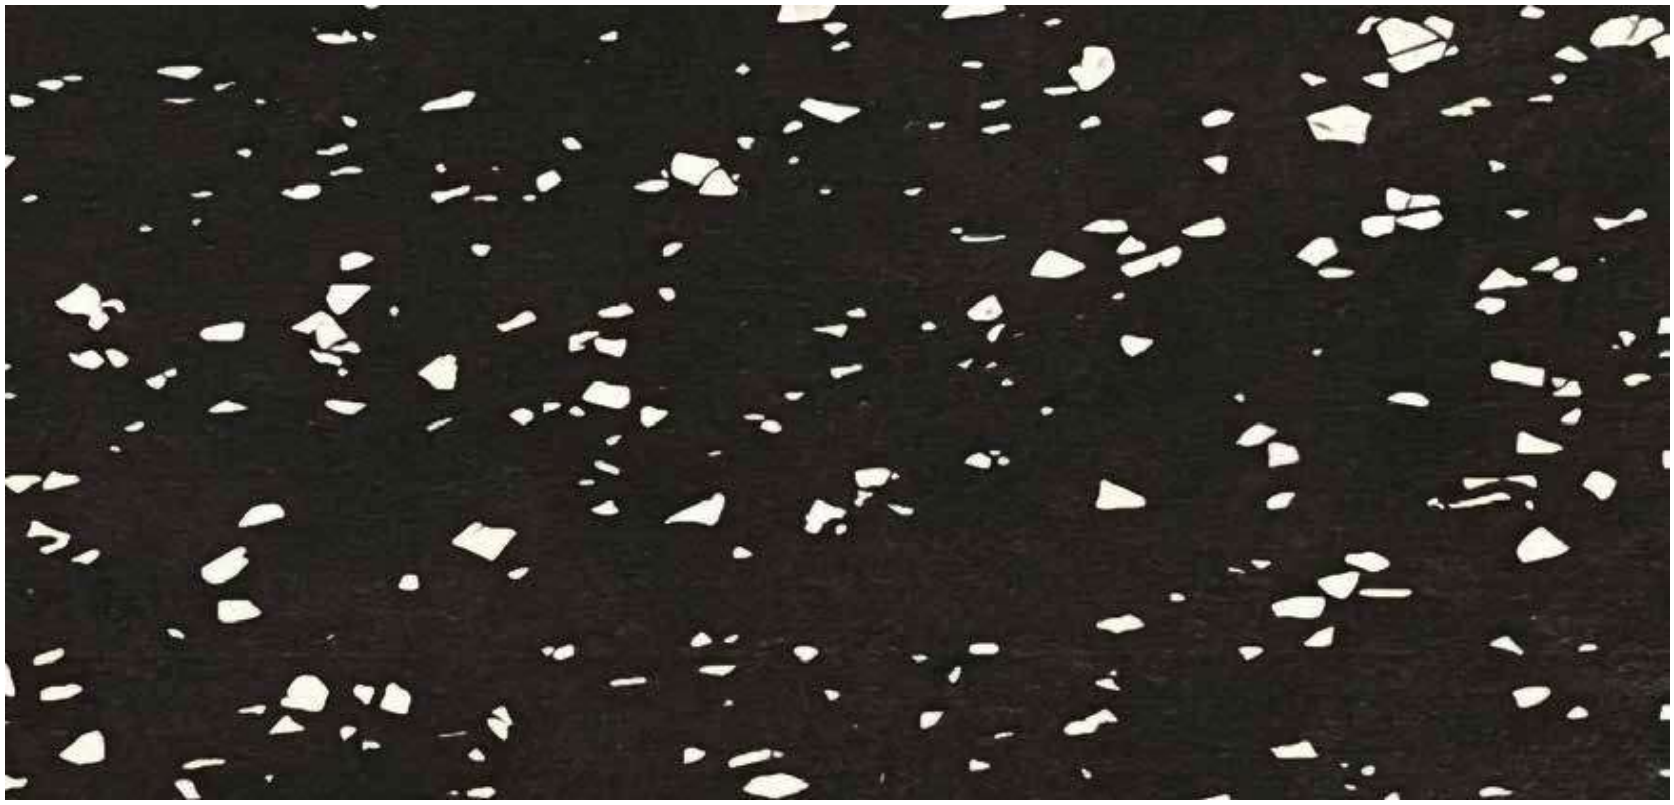

IN STOCK

6201 WHITE Cap_Locking Tile 500 x 500 x 20mm



IN STOCK

6202 BLUE Cap_Locking Tile 500 x 500 x 20mm

Colour Options



6203 YELLOW



6204 GREEN



6205 RED



6206 ORANGE



6207 GREY



6208 DARK GREY



6209 PURPLE

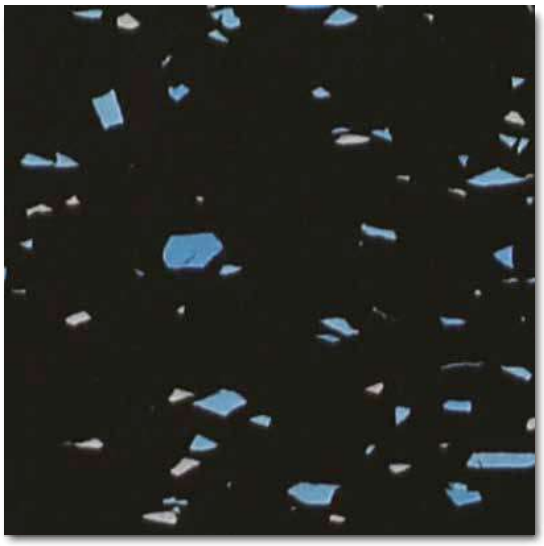

6210 BLUE-GREY



6211 RED-GREY

FlexiCare
Adaptable Solutions

Technical Datasheet

FlexiCare™ is a smart and durable rubber flooring solution made from recycled tire rubber and colored EPDM granules. It offers maximum comfort, slip resistance, and shock absorption, making it ideal for fitness areas, home gyms, garages, and high-traffic zones.

Material Composition

Fine-grained recycled tire rubber with 15% colored EPDM granules, bonded using high-strength polyurethane elastomer. Alternative compositions may include recycled PU-foam and latex granules for added flexibility.

Product Specifications

Thickness Options	**6mm, 8mm, 10mm, 20mm, 25mm, 30mm**
Tile Sizes	500x500mm, 610x610mm, 1000x1000mm
Packing (500x500mm）	8 Tiles/Pack (21.52 sq.ft)
Packing（610x610mm）	8 Tiles/Pack (32 sq.ft)）
Packing （1000x1000mm）	50 Tiles/Pallet
Surface	EPDM Granules, Anti-slip, Shock-absorbent
System	Cap Locking System (optional for interlocking tiles)  **Interlocking Tiles** Thickness: 6mm, 8mm, 10mm Size: 500 x 500mm, 610 x 610mm  **Cap Locking System** Thickness: 20mm, 25mm, 30mm Size: 500 x 500mm, 1000 x 1000mm

Recommended Applications

- Home Gyms
- Fitness Clubs
- Garages & Basements
- Commercial & Traffic Areas
- Multi-purpose Sports Rooms

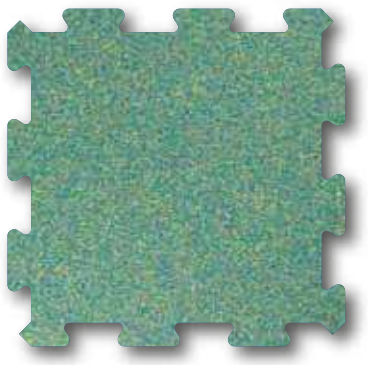

A mixture of recycled PU-foam and Latex granules bonded with polyurethane elastomer.