PrimeaCare

Premier Quality & Dedication










UniCare


Unified Solutions for Every Space

Basketball | Volleyball | Badminton | Futsal | Handball | Table tennis

WOOD Colours

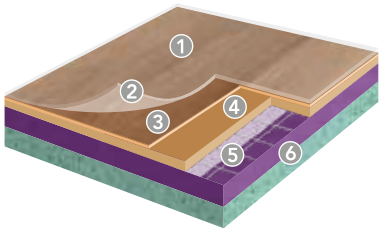

1. PUR coating(Available by request)
2. Durable wear layer
3. Printing layer
4. Compact layer
5. Reinforced fiberglass layers
6. Closed cell foam backing

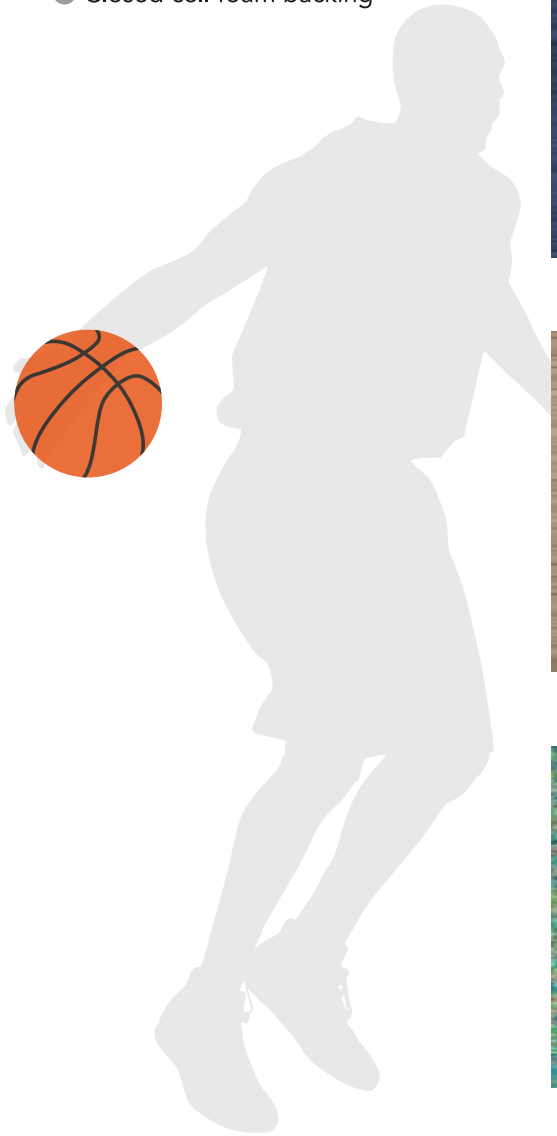



Maple 6381

IN STOCK



Oak 6375


IN STOCK



Maple Blue 6453



Maple Grey 6701

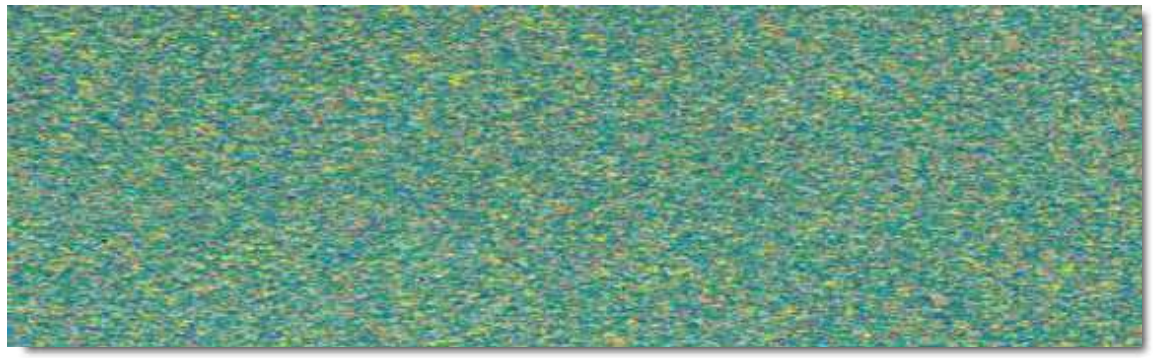


Underlayer 6mm


IN STOCK

*Product lifetime: 10 years


UNI Colours

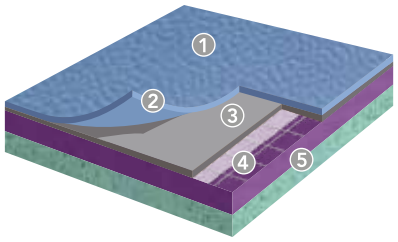


1. PUR coating(Available by request)
2. Durable wear layer
3. Compact layer
4. Reinforced fiberglass layers
5. Closed cell foam backing

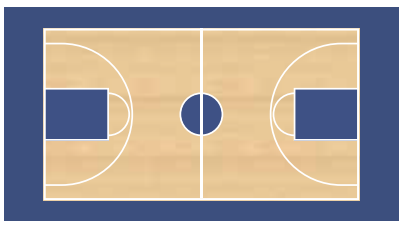

BASKETBALL
Play area: 28m X 15m
Play area + surround: 32m X 19m

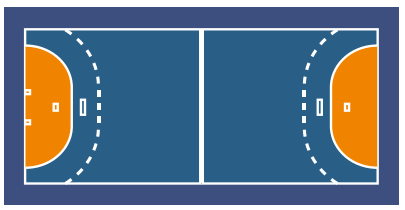

HANDBALL
Play area: 40m X 20m
Play area + surround: 44m X 24m

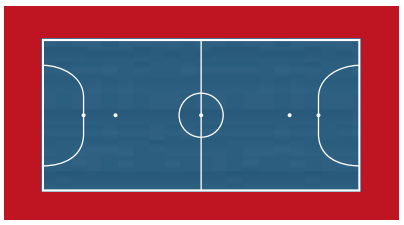

FUTSAL
Play area: 38~42m X 18~22m
Line width: 8cm



Light Blue 6445 IN STOCK



Dark Blue 6430 IN STOCK



Grey 6873 IN STOCK



Red 6180



Orange 6038



Mint Green 6570

*Product lifetime: 10 years

UniCare

Unified Solutions for Every Space

UniCare is a multi-purpose vinyl sports flooring that has been designed to accommodate a wide range of sporting events. Uni Care is available in four thicknesses to satisfy varying degrees of shock absorption and performance requirements adapted to all levels of sports.

TECHNICAL DATA	STANDARD	SPORTS 45	SPORTS 60	SPORTS 80
PRODUCT DESCRIPTION				
Total thickness	EN 428	4.5mm	6.0mm	8.0mm
Width	EN 426	1.8m	1.8m	1.8m
Length	EN 426	20.0m	20.0m	20.0m
Weight	EN 430	2.9kg/m²	4.2kg/m²	5.2kg/m²
SPORTS CHARACTERISTICS				
Shock absorption	EN 14808	23%	32%	38%
Vertical deformation	EN 14809	≤3.5	≤3.5	≤3.5
Energy return	NF P 90 203	≥0.31	≥0.31	≥0.31
Sliding coefficient	EN 13036-4	80 -110	80 -110	80 -110
Ball bounce	EN 12235	≥90%	≥90%	≥90%
TECHNICAL CHARACTERISTICS				
Abrasion resistance	EN ISO 5470-1	≤350mg	≤350mg	≤350mg
Impact resistance	EN 1517	≥8	≥8	≥8
Indentation resistance	EN 1516	≤0.5mm	≤0.5mm	≤0.5mm
Surface treatment	---	PUR	PUR	PUR
Foam backing	---	Honeycomb	Honeycomb	Honeycomb
Anti-bacterial	---	Yes	Yes	Yes
CLASSIFICATION				
Fire resistance	EN 13501-1	Cfl-s1	Cfl-s1	Cfl-s1
Light resistance	EN ISO 105-B02	≥6	≥6	≥6
Sound isolation	EN ISO 717/2	20dB	22dB	26dB
CE MARKING CE	EN 14041			

Olympic Games | World Championships | Asian Games

Partner of International Sport Events